


Nouzové svítidlo

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; Room height 2.2 to 7 m; 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; Ceiling surface-mounted luminaire; Screw mounting of the gear tray, tool-free quick mounting of the cover; Luminaire housing made of diecast aluminium, powder-coated; housing colour white (close to RAL9016); White fibre-glass reinforced PC cover with transparent PC light outlet; luminaire housing made of diecast aluminium, powder-coated white, similar to RAL 9016; Luminaire with local battery supply for 8 h emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained mode: +5°C to +30°C, non-maintained mode: +5°C to +35°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz; Luminaire input power: 5.5 W (with battery fast-charge in maintained mode); typical power (without battery charge): 3 W in maintained mode / 1,1 W in non-maintained mode; Non-maintained and maintained mode settable via jumper and NFC interface; IP65; SC1; Luminaire wired with halogen-free leads. Supply line not halogen-free, ballproof; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK04; Dimensions: 200 x 145 x 64 mm; weight: 1.2 kg; Luminaire with D symbol (for use in environments in which no unusual accumulation of dust is expected); Robust, integrated battery with 3-year warranty. Valid according to terms of the manufacturer's warranty, available at https://www.zumtobel.com/media/downloads/Garantiebedingungen_DE.pdf; Battery warranty invalid if installation takes place three (3) months after delivery EXW (Incoterms 2010)




ZS_RES_F_PRO_MSC_IP65_ExD_ANT_WH.jpg

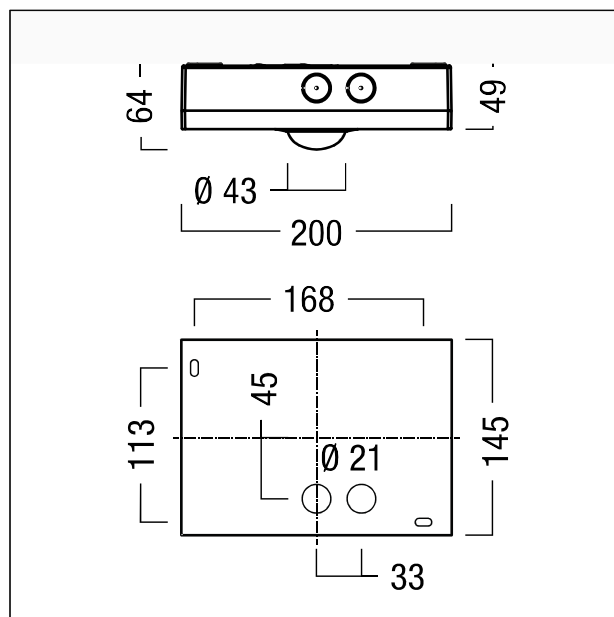

ZS_RES_M_PRO_MSC_IP65.wmf

Křivka svítivosti

STD – standard

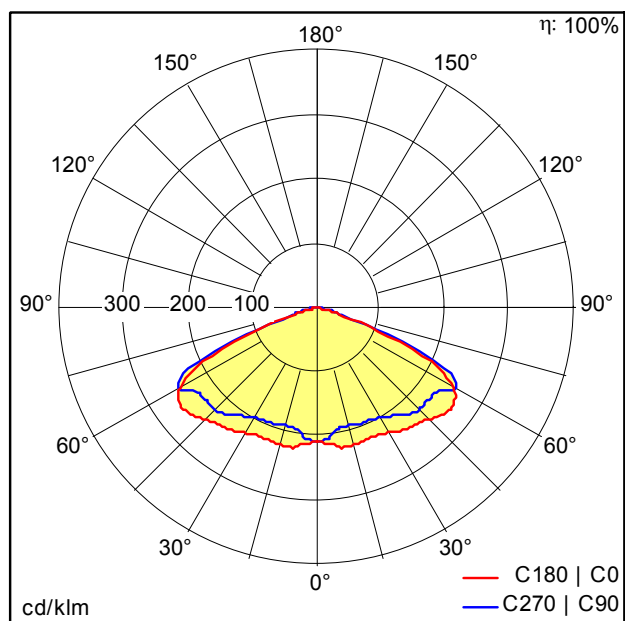

D39163AA_RESCLITE_PRO_MSC_ANT_E8D_WH.Idt

Viz také doplňkové informace na následující straně

- Světelný zdroj: LED
- Světelný tok*: 146 lm
- Celkový nouzový světelný tok: 146 lm
- Světelný výkon svítidel*: 27 lm/W
- Index podání barev - CRI min.: 70
- Předřadník: 1 x 89800524 DRV EM TR LBS P ST DA 5W 2
- Barevná tolerance v místě (MacAdam): 5
- Střední dimenzovaná životnost*: L95 100000h při/u 25°C
- Příkon svítidla*: 5,5 W Výkonový faktor = 0,7
- Příkon v pohotovostním režimu*: 1,2 W
- Napájení: 1,25 W
- Vyměření doby provozu: 8 h

RESCLITE PRO MSC, přisazené stropní IP65



ZUMTOBEL

RESCLITE PRO MSC ANT E8D WH IP65

42930003

Nouzové svítidlo

Tento výrobek obsahuje světelný zdroj s třídou energetické účinnosti D.